

Cutting layout


The fabric is folded selvedge to selvedge, so the usable width is HALF the bolt. A piece marked "ON FOLD" sits on that fold.

PURCHASE SEPARATELY: 1 x 755 mm double-fold bias binding, 10 mm finished width, for neck. Not included in cloth yardage.

PURCHASE SEPARATELY: 2 x 400 mm double-fold bias binding, 10 mm finished width, for armhole. Not included in cloth yardage.

PURCHASE SEPARATELY: 1 zip, at least 500 mm long, for the centre back opening (sewing guide section 3b). Not included in cloth yardage.


115 cm wide fabric - layout uses 2.29 m

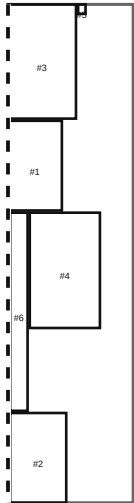

scale 1:35 . dashed line on the left = the fold . usable width 575 mm

#3 FRONT SKIRT: ON FOLD . #1 FRONT BODICE: ON FOLD . #6 bel_kemeri: 1, TOP LAYER ONLY, TURNED 90 DEG: ARROW ALONG THE FOLD . #4 BACK SKIRT: 2 MIRRORED . #2 BACK BODICE: 2 MIRRORED . #5 FRONT STRIP: 2 MIRRORED

150 cm wide fabric - layout uses 1.45 m

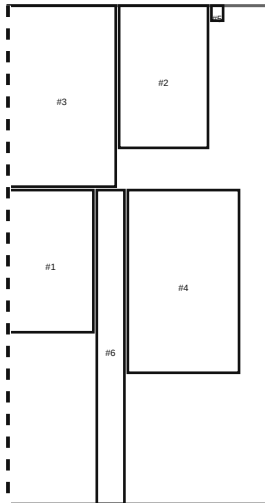

scale 1:22 . dashed line on the left = the fold . usable width 750 mm

#3 FRONT SKIRT: ON FOLD . #1 FRONT BODICE: ON FOLD . #6 bel_kemeri: 1, TOP LAYER ONLY, TURNED 90 DEG: ARROW ALONG THE FOLD . #4 BACK SKIRT: 2 MIRRORED . #2 BACK BODICE: 2 MIRRORED . #5 FRONT STRIP: 2 MIRRORED

Yardage covers these placements only; shrinkage and matching prints need extra cloth. Keep each grainline parallel to the selvedge. Cut single pieces through the top layer only. CHECKED FABRIC: the layout above is drawn folded for plain fabric. Cut checks single layer, right side up (sewing guide, section 1): open the fabric, lay each piece as drawn and again flipped for its mirrored copy, and add about 0.5 m to the length above to match the checks.