


Cutting layout

The fabric is folded selvedge to selvedge, so the usable width is HALF the bolt. A piece marked "ON FOLD" sits on that fold.

PURCHASE SEPARATELY: 1 x 699 mm double-fold bias binding, 12 mm finished width, for neck. Not included in cloth yardage.

PURCHASE SEPARATELY: lightweight fusible interfacing for the two front facings, 2 x 70 mm wide x 406 mm long (sewing guide section 3b).
Not included in cloth yardage.


115 cm wide fabric - layout uses 1.49 m

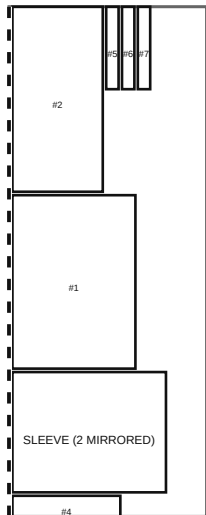

scale 1:22 . dashed line on the left = the fold . usable width 575 mm

#2 arka_ust: 2 MIRRORED . #1 on_ust: 2 MIRRORED . #3 SLEEVE: 2 MIRRORED . #5 FRONT TIE 1: 2 MIRRORED . #6 FRONT TIE 2: 2 MIRRORED . #7 FRONT TIE 3: 2 MIRRORED . #4 CUFF: 2 MIRRORED

150 cm wide fabric - layout uses 0.97 m

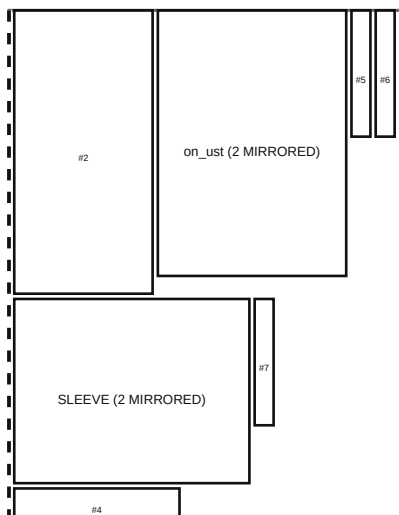

scale 1:14 . dashed line on the left = the fold . usable width 750 mm

#2 arka_ust: 2 MIRRORED . #1 on_ust: 2 MIRRORED . #3 SLEEVE: 2 MIRRORED . #5 FRONT TIE 1: 2 MIRRORED . #6 FRONT TIE 2: 2 MIRRORED . #7 FRONT TIE 3: 2 MIRRORED . #4 CUFF: 2 MIRRORED

Yardage covers these placements only; shrinkage and matching prints need extra cloth. Keep each grainline parallel to the selvedge. Cut single pieces through the top layer only. CHECKED FABRIC: the layout above is drawn folded for plain fabric. Cut checks single layer, right side up (sewing guide, section 1): open the fabric, lay each piece as drawn and again flipped for its mirrored copy, and add about 0.5 m to the length above to match the checks.