


Cutting layout

The fabric is folded selvedge to selvedge, so the usable width is HALF the bolt. A piece marked "ON FOLD" sits on that fold.

PURCHASE SEPARATELY: 1 x 407 mm double-fold bias binding, 5 mm finished width, for neck. Not included in cloth yardage.

PURCHASE SEPARATELY: 1 zip, at least 580 mm long, for the centre back opening (sewing guide section 3b). Not included in cloth yardage.


115 cm wide fabric - layout uses 1.40 m

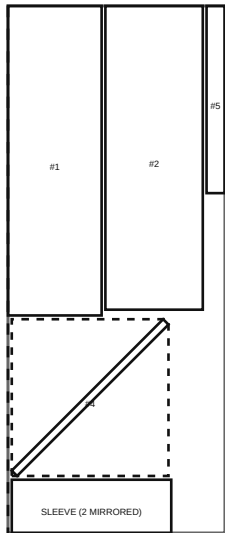

scale 1:20 . dashed line on the left = the fold . usable width 575 mm

#1 FRONT: ON FOLD . #2 BACK: 2 MIRRORED . #5 FRONT BOW: 2 MIRRORED . #4 FRONT KEYHOLE 1 BINDING: 1, TOP LAYER ONLY, ON THE BIAS . #3 SLEEVE: 2 MIRRORED

150 cm wide fabric - layout uses 1.40 m

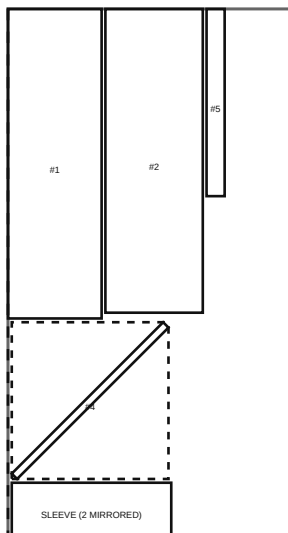

scale 1:20 . dashed line on the left = the fold . usable width 750 mm

#1 FRONT: ON FOLD . #2 BACK: 2 MIRRORED . #5 FRONT BOW: 2 MIRRORED . #4 FRONT KEYHOLE 1 BINDING: 1, TOP LAYER ONLY, ON THE BIAS . #3 SLEEVE: 2 MIRRORED

Yardage covers these placements only; shrinkage and matching prints need extra cloth. Keep each grainline parallel to the selvedge. Cut single pieces through the top layer only. A bias strip is drawn at 45 degrees inside its dashed footprint: cut it once, through the top layer only, at its full unfolded length; the footprint is the cloth it needs, not its shape.